



IES ROAD REPORT
PHOTOMETRIC FILENAME : GCJ3-30J-MV-22K-3R-XX-075-PCR7.S.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TESTLAB] Scaled from NVLA- LM-79 for GCJ3-30J-MV-30K-3R-XX-095
 [ISSUEDATE] 06/23/2022
 [MANUFAC] Leotek Electronics USA LLC
 [LUMCAT] GCJ3-30J-MV-22K-3R-XX-075-PCR7


CHARACTERISTICS

IES Classification	Type III
Longitudinal Classification	Medium
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	7631
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	127
Total Luminaire Watts	60
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Maximum Candela	3439.365
Maximum Candela Angle	65H 74V
Maximum Candela (<90 Degrees Vertical)	3439.365
Maximum Candela Angle (<90 Degrees Vertical)	65H 74V
Maximum Candela At 90 Degrees Vertical	0 (0.0% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	1102.372 (14.4% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

LUMINAIRE CLASSIFICATION SYSTEM (LCS)


	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	807.9	N.A.	10.6
FM - Front-Medium (30-60)	2633.9	N.A.	34.5
FH - Front-High (60-80)	2085.7	N.A.	27.3
FVH - Front-Very High (80-90)	65.7	N.A.	0.9
BL - Back-Low (0-30)	511.6	N.A.	6.7
BM - Back-Medium (30-60)	1000.6	N.A.	13.1
BH - Back-High (60-80)	507.4	N.A.	6.6
BVH - Back-Very High (80-90)	18.1	N.A.	0.2
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	7630.9	N.A.	100.0
BUG Rating	B2-U0-G2		

POLAR GRAPH

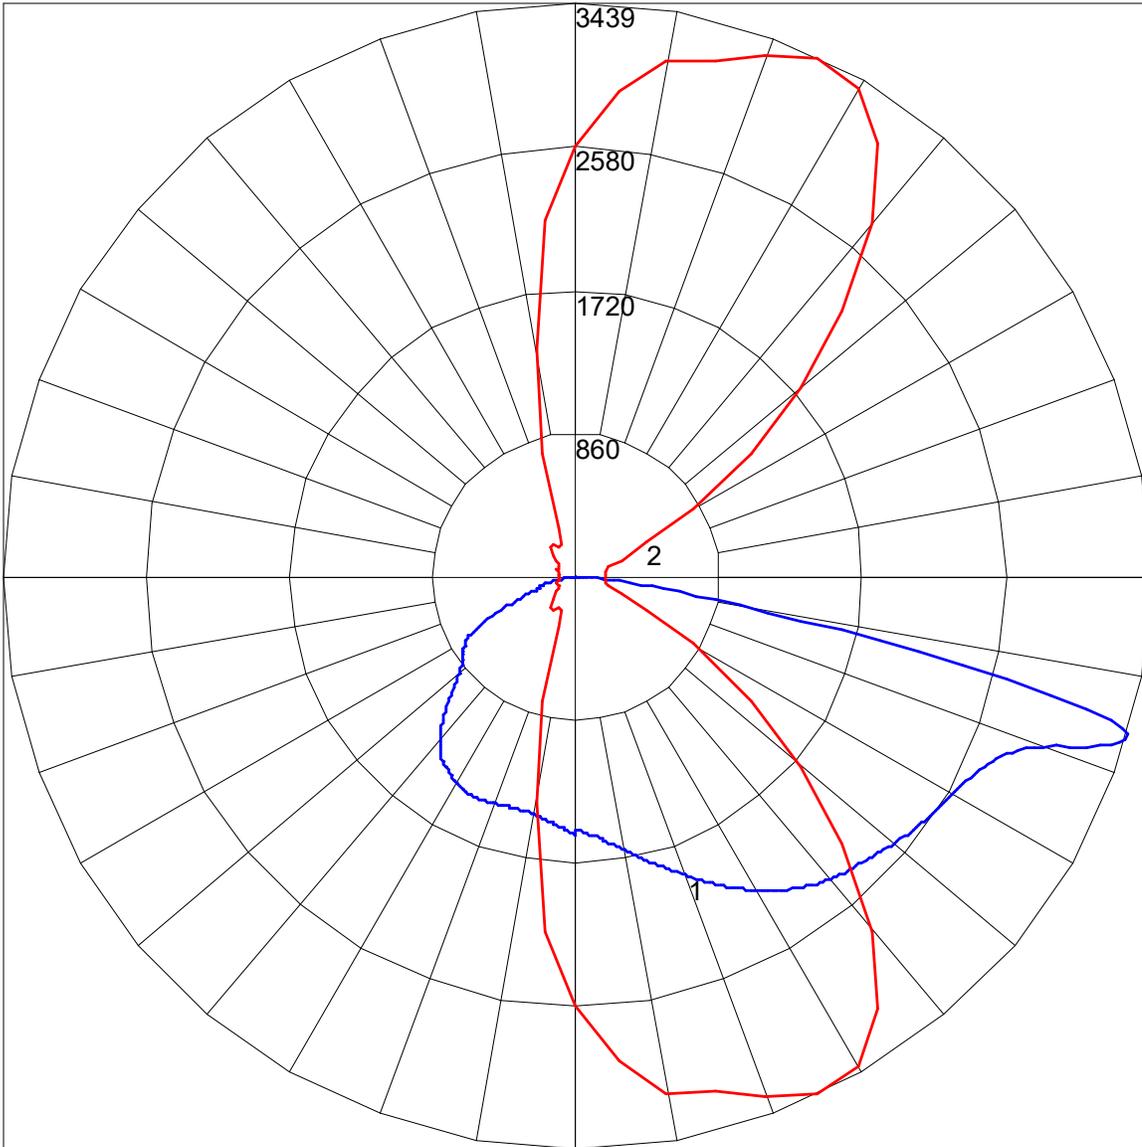


Maximum Candela = 3439.365 Located At Horizontal Angle = 65, Vertical Angle = 74
1 - Vertical Plane Through Horizontal Angles (65 - 245) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (74) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

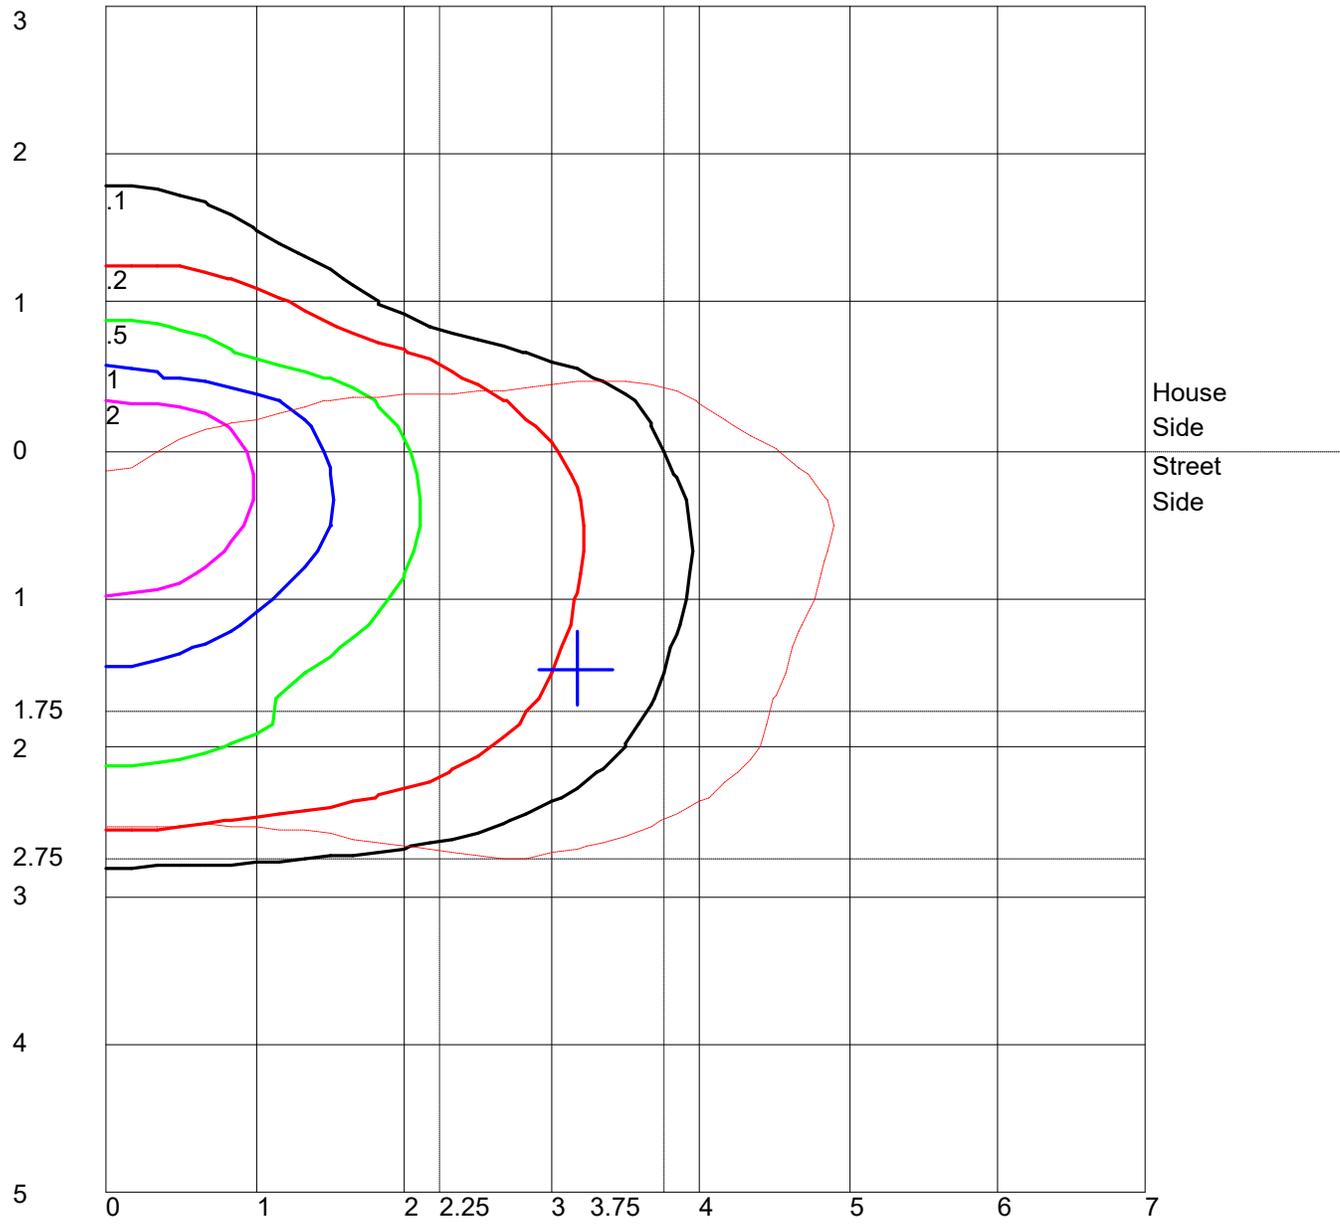

Distance In Units Of Mounting Height
 Values Based On 20 Foot Mounting Height
 1/2 Maximum Candela Trace Shown As Dashed Curve
 (+) = Maximum Candela Point

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

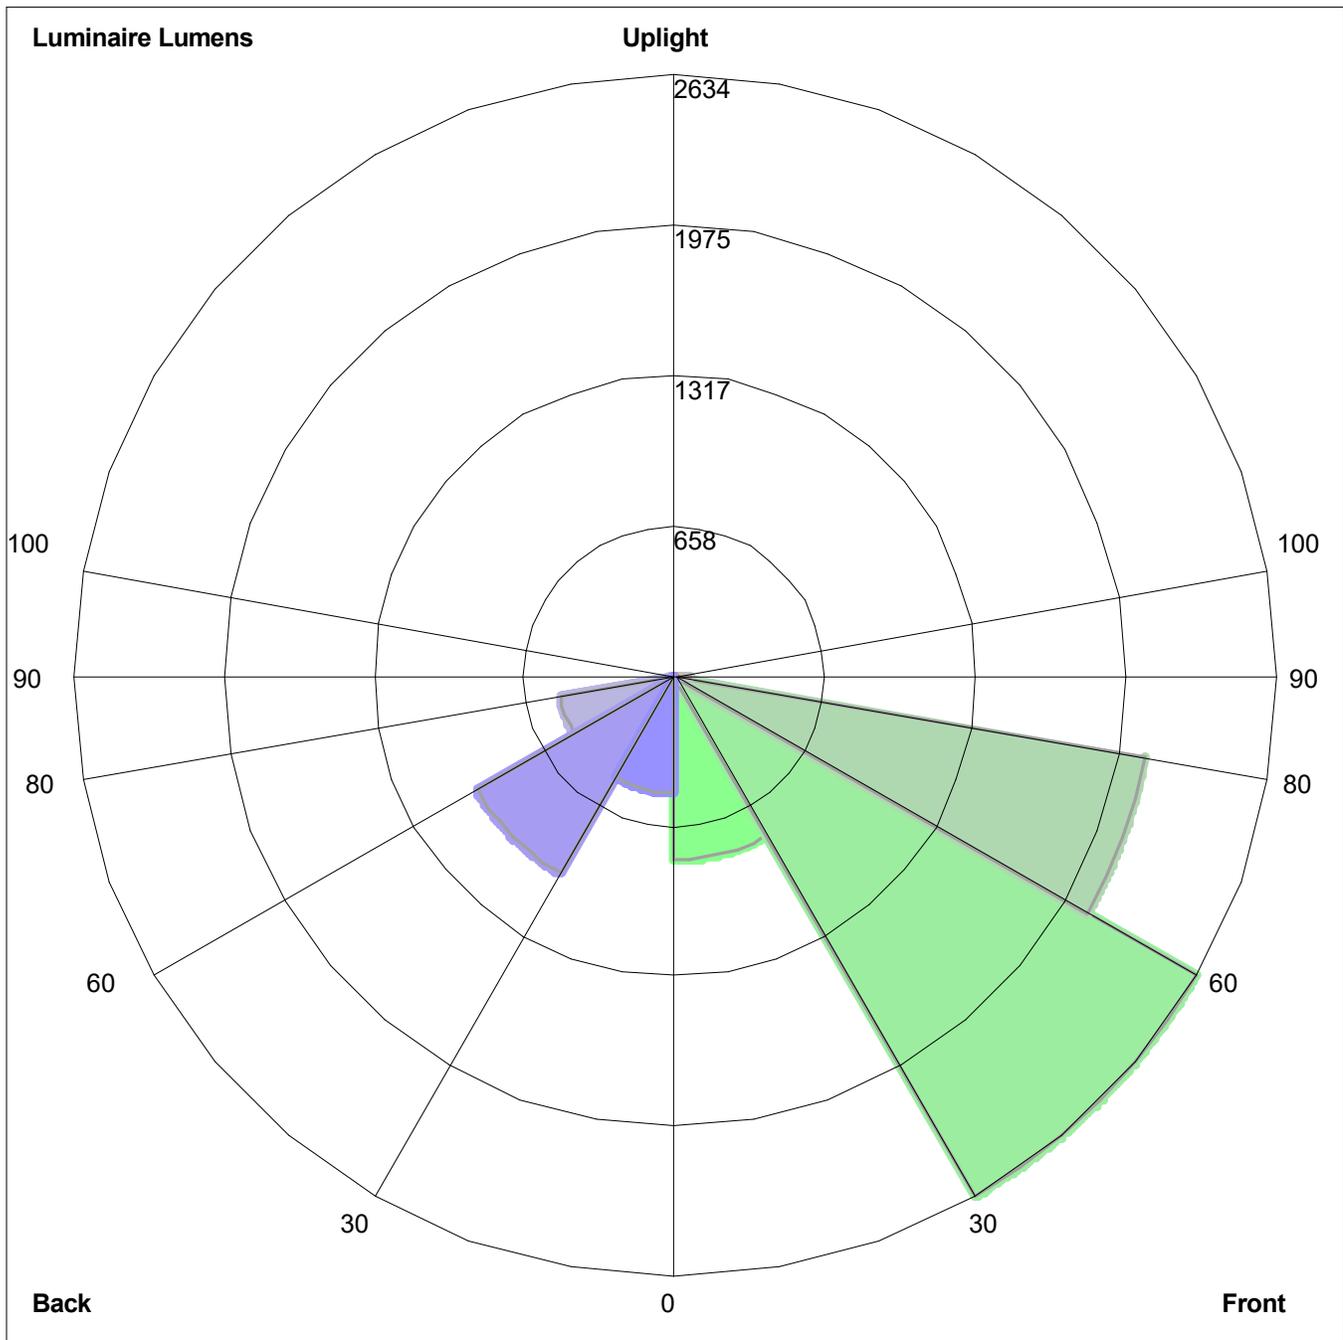

Luminaire Lumens:
Front: Low=807.9, Medium=2633.9, High=2085.7, Very High=65.7
Back: Low=511.6, Medium=1000.6, High=507.4, Very High=18.1
Uplight: Low=0.0, High=0.0

BUG Rating : B2-U0-G2