



**IES ROAD REPORT**

**PHOTOMETRIC FILENAME : GCL3-80J-MV-27K-2R-XX-300 S.IES**

**DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
[TESTLAB] Scaled from NVLAP LM-79 for GCL3-80J-MV-30K-2R-XX-325  
[ISSUE DATE] 12/17/2022  
[MANUFAC] Leotek Electronics USA LLC  
[LUMCAT] GCL3-80J-MV-27K-2R-XX-300


**CHARACTERISTICS**

IES Classification	Type II
Longitudinal Classification	Medium
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	29822
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	120
Total Luminaire Watts	248
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Maximum Candela	22519.745
Maximum Candela Angle	280H 72.5V
Maximum Candela (<90 Degrees Vertical)	22519.745
Maximum Candela At 90 Degrees Vertical)	280H 72.5V
Maximum Candela At 90 Degrees Vertical	0 (0.0% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	4609.133 (15.5% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

**LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	3302.5	N.A.	11.1
FM - Front-Medium (30-60)	12351.9	N.A.	41.4
FH - Front-High (60-80)	7033.3	N.A.	23.6
FVH - Front-Very High (80-90)	152.1	N.A.	0.5
BL - Back-Low (0-30)	2107.2	N.A.	7.1
BM - Back-Medium (30-60)	3255.2	N.A.	10.9
BH - Back-High (60-80)	1575.8	N.A.	5.3
BVH - Back-Very High (80-90)	44.4	N.A.	0.1
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
<b>Total</b>	<b>29822.4</b>	<b>N.A.</b>	<b>100.0</b>
BUG Rating	B3-U0-G3		


**COEFFICIENTS OF UTILIZATION**

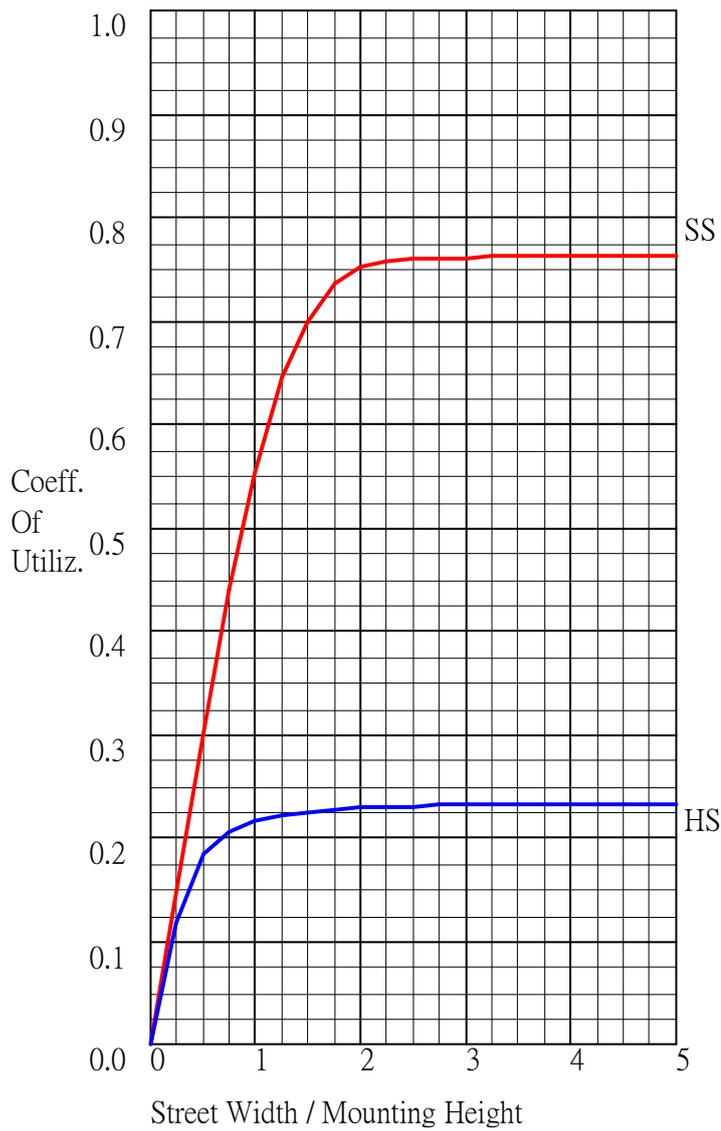

**FLUX DISTRIBUTION**


	Lumens	Percent Of Luminaire
Downward Street Side	22839.7	76.6
Downward House Side	6982.6	23.4
Downward Total	29822.3	100.0
Upward Street Side	0.0	0.0
Upward House Side	0.0	0.0
Upward Total	0.0	0.0
Total Flux	29822.3	100.0

POLAR GRAPH

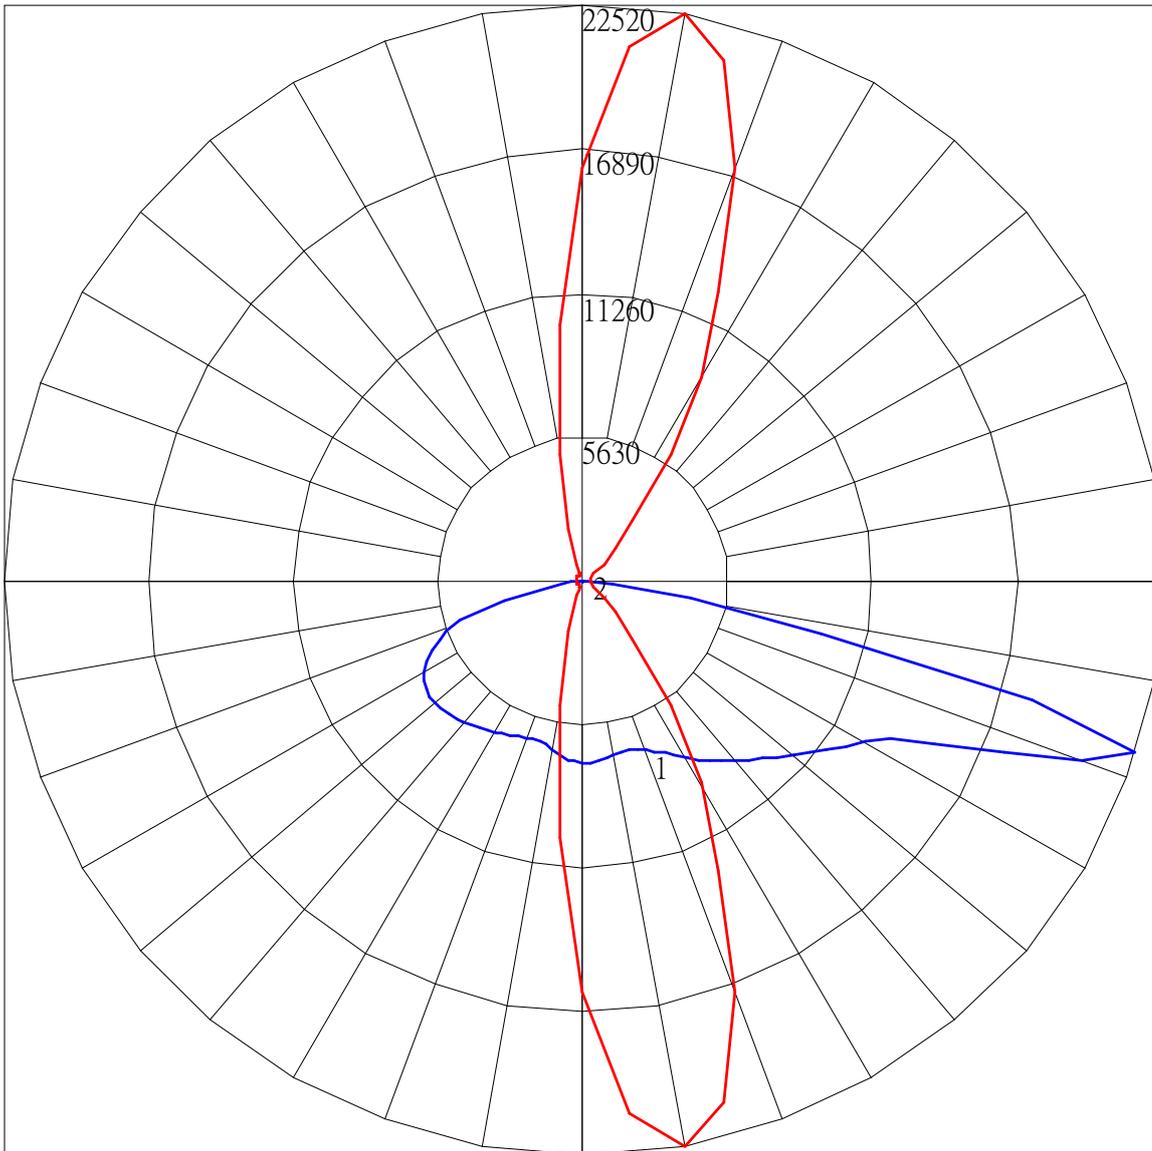


Maximum Candela = 22519.745 Located At Horizontal Angle = 280, Vertical Angle = 72.5  
# 1 - Vertical Plane Through Horizontal Angles (280 - 100) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (72.5) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

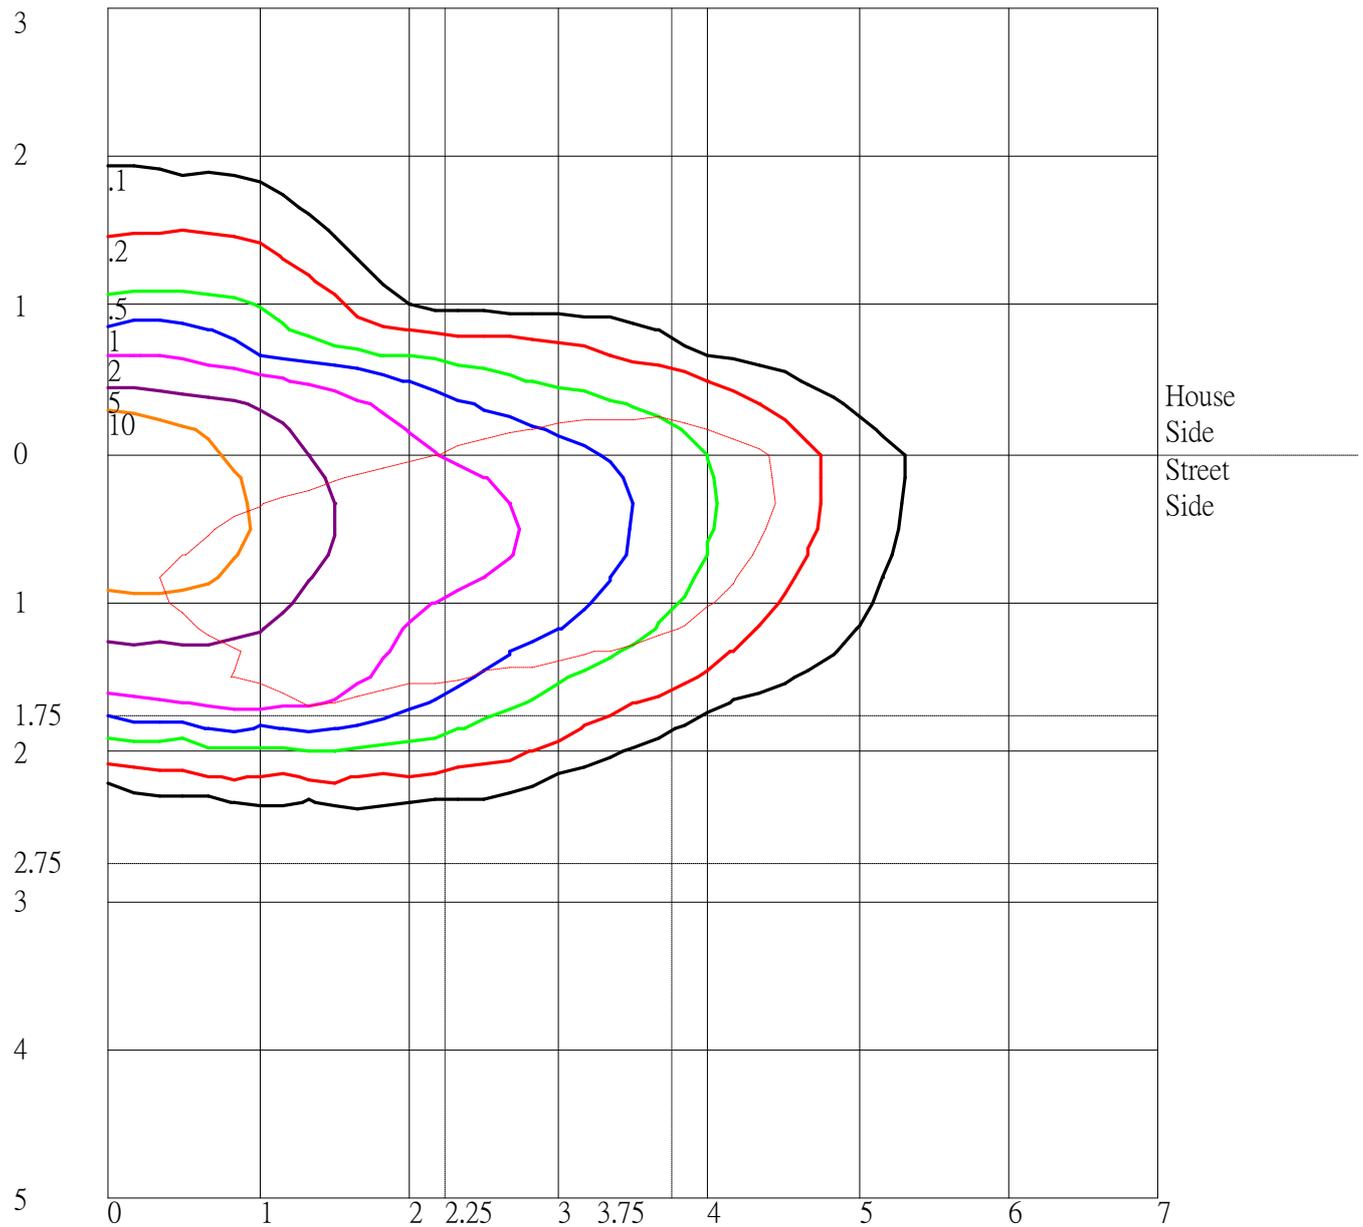

Distance In Units Of Mounting Height  
 Values Based On 20 Foot Mounting Height  
 1/2 Maximum Candela Trace Shown As Dashed Curve  
 (+) = Maximum Candela Point

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

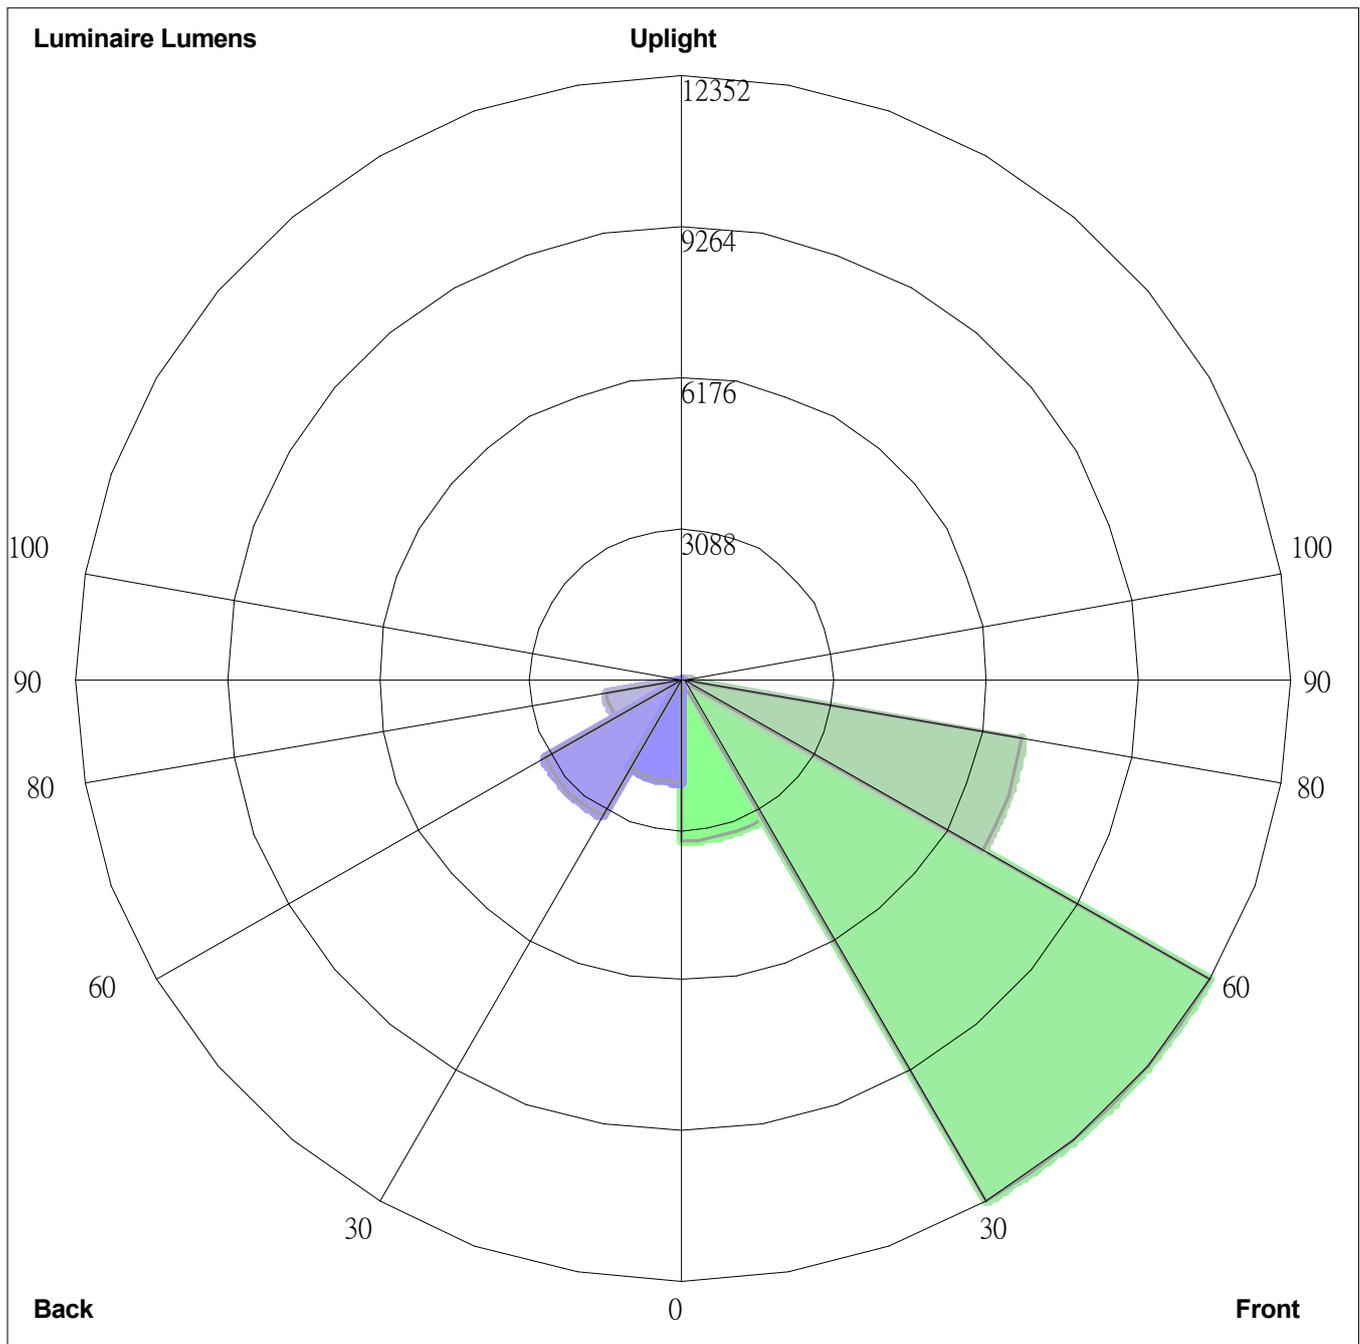

Luminaire Lumens:  
Front: Low=3302.5, Medium=12351.9, High=7033.3, Very High=152.1  
Back: Low=2107.2, Medium=3255.2, High=1575.8, Very High=44.4  
Uplight: Low=0.0, High=0.0

BUG Rating : B3-U0-G3