



IES ROAD REPORT

PHOTOMETRIC FILENAME : GCL2-80J-MV-27K-5-XX-230 S.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TESTLAB] Scaled from NVLAP LM-79 for GCL2-80J-MV-30K-5-XX-225
 [ISSUEDATE] 6/20/2019
 [MANUFAC] Leotek Electronics USA LLC
 [LUMCAT] GCL2-80J-MV-27K-5-XX-240


CHARACTERISTICS

IES Classification	Type VS
Longitudinal Classification	Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	23194
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	134
Total Luminaire Watts	173
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Maximum Candela	9208.128
Maximum Candela Angle	50H 67.5V
Maximum Candela (<90 Degrees Vertical)	9208.128
Maximum Candela At 90 Degrees Vertical)	50H 67.5V
Maximum Candela At 90 Degrees Vertical	0 (0.0% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	363.219 (1.6% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

LUMINAIRE CLASSIFICATION SYSTEM (LCS)

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	1448.4	N.A.	6.2
FM - Front-Medium (30-60)	5407.4	N.A.	23.3
FH - Front-High (60-80)	4707.2	N.A.	20.3
FVH - Front-Very High (80-90)	33.9	N.A.	0.1
BL - Back-Low (0-30)	1448.4	N.A.	6.2
BM - Back-Medium (30-60)	5407.4	N.A.	23.3
BH - Back-High (60-80)	4707.2	N.A.	20.3
BVH - Back-Very High (80-90)	33.9	N.A.	0.1
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	23193.8	N.A.	100.0
BUG Rating	B4-U0-G2		


COEFFICIENTS OF UTILIZATION

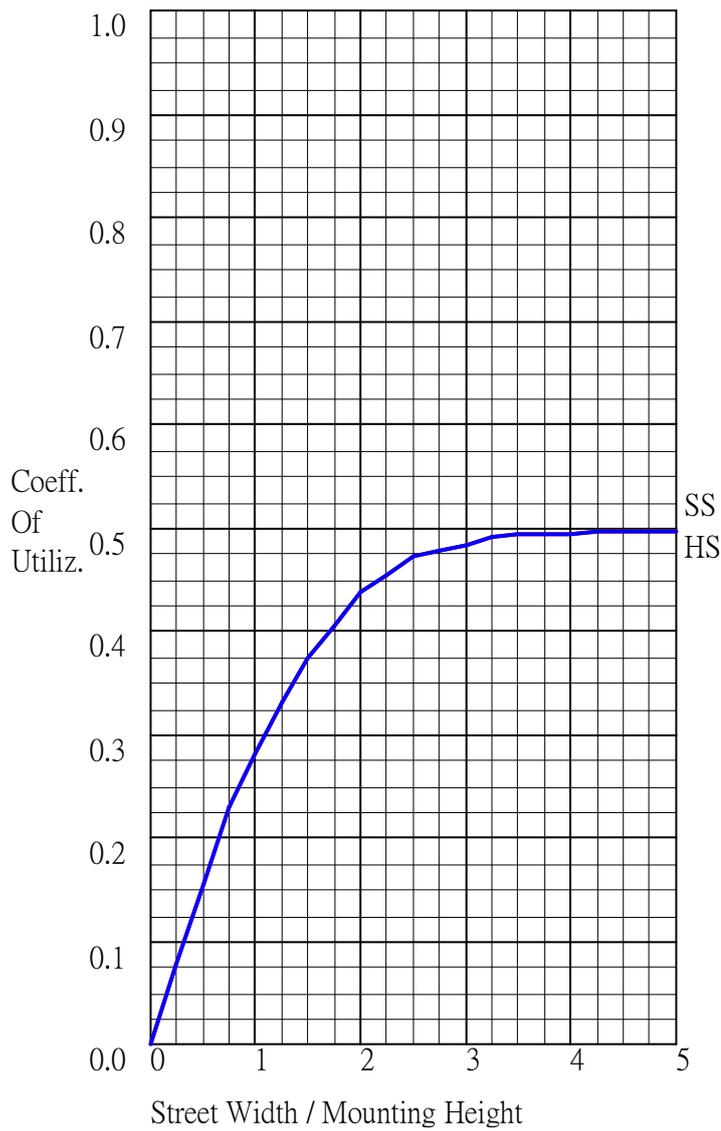

FLUX DISTRIBUTION


	Lumens	Percent Of Luminaire
Downward Street Side	11596.9	50.0
Downward House Side	11596.9	50.0
Downward Total	23193.8	100.0
Upward Street Side	0.0	0.0
Upward House Side	0.0	0.0
Upward Total	0.0	0.0
Total Flux	23193.8	100.0

POLAR GRAPH

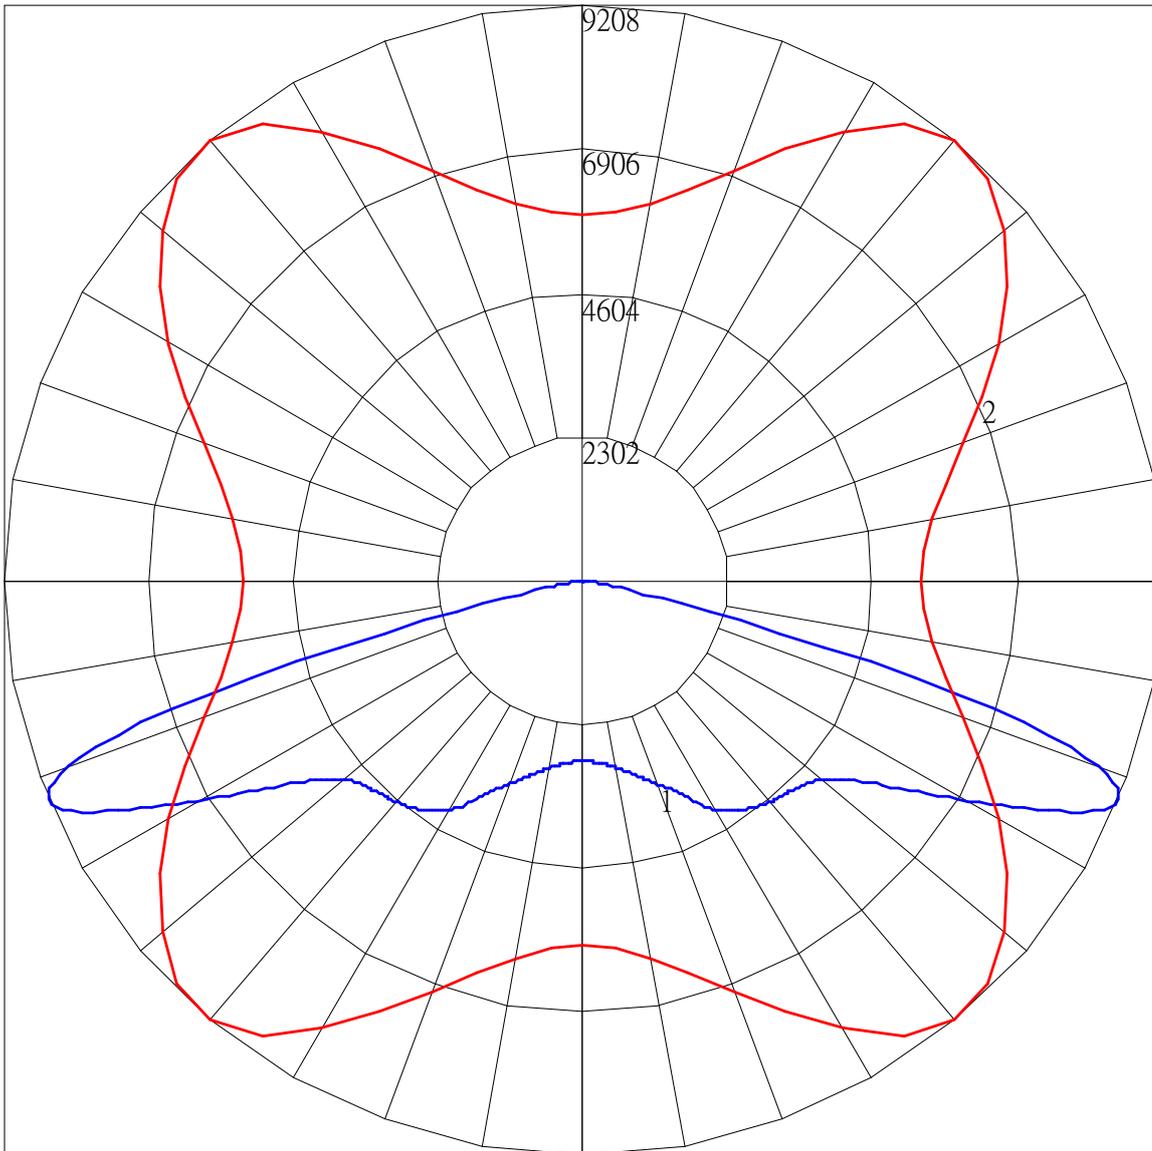


Maximum Candela = 9208.128 Located At Horizontal Angle = 50, Vertical Angle = 67.5
1 - Vertical Plane Through Horizontal Angles (50 - 230) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (67.5) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

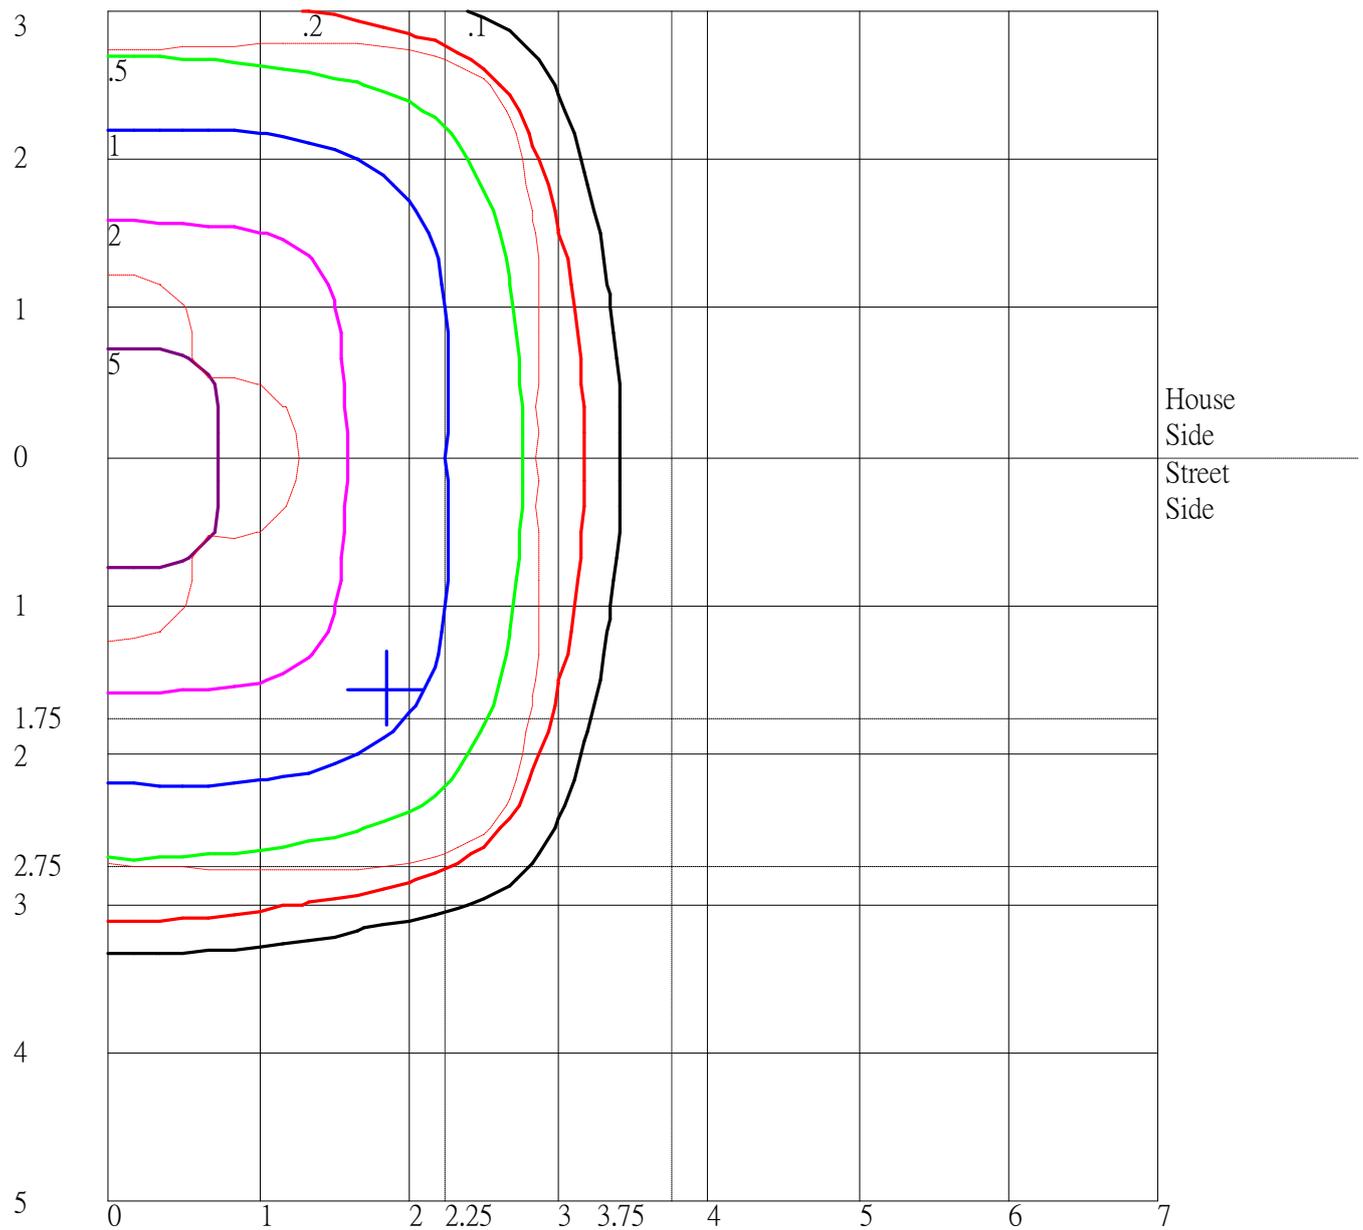

Distance In Units Of Mounting Height
 Values Based On 20 Foot Mounting Height
 1/2 Maximum Candela Trace Shown As Dashed Curve
 (+) = Maximum Candela Point

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

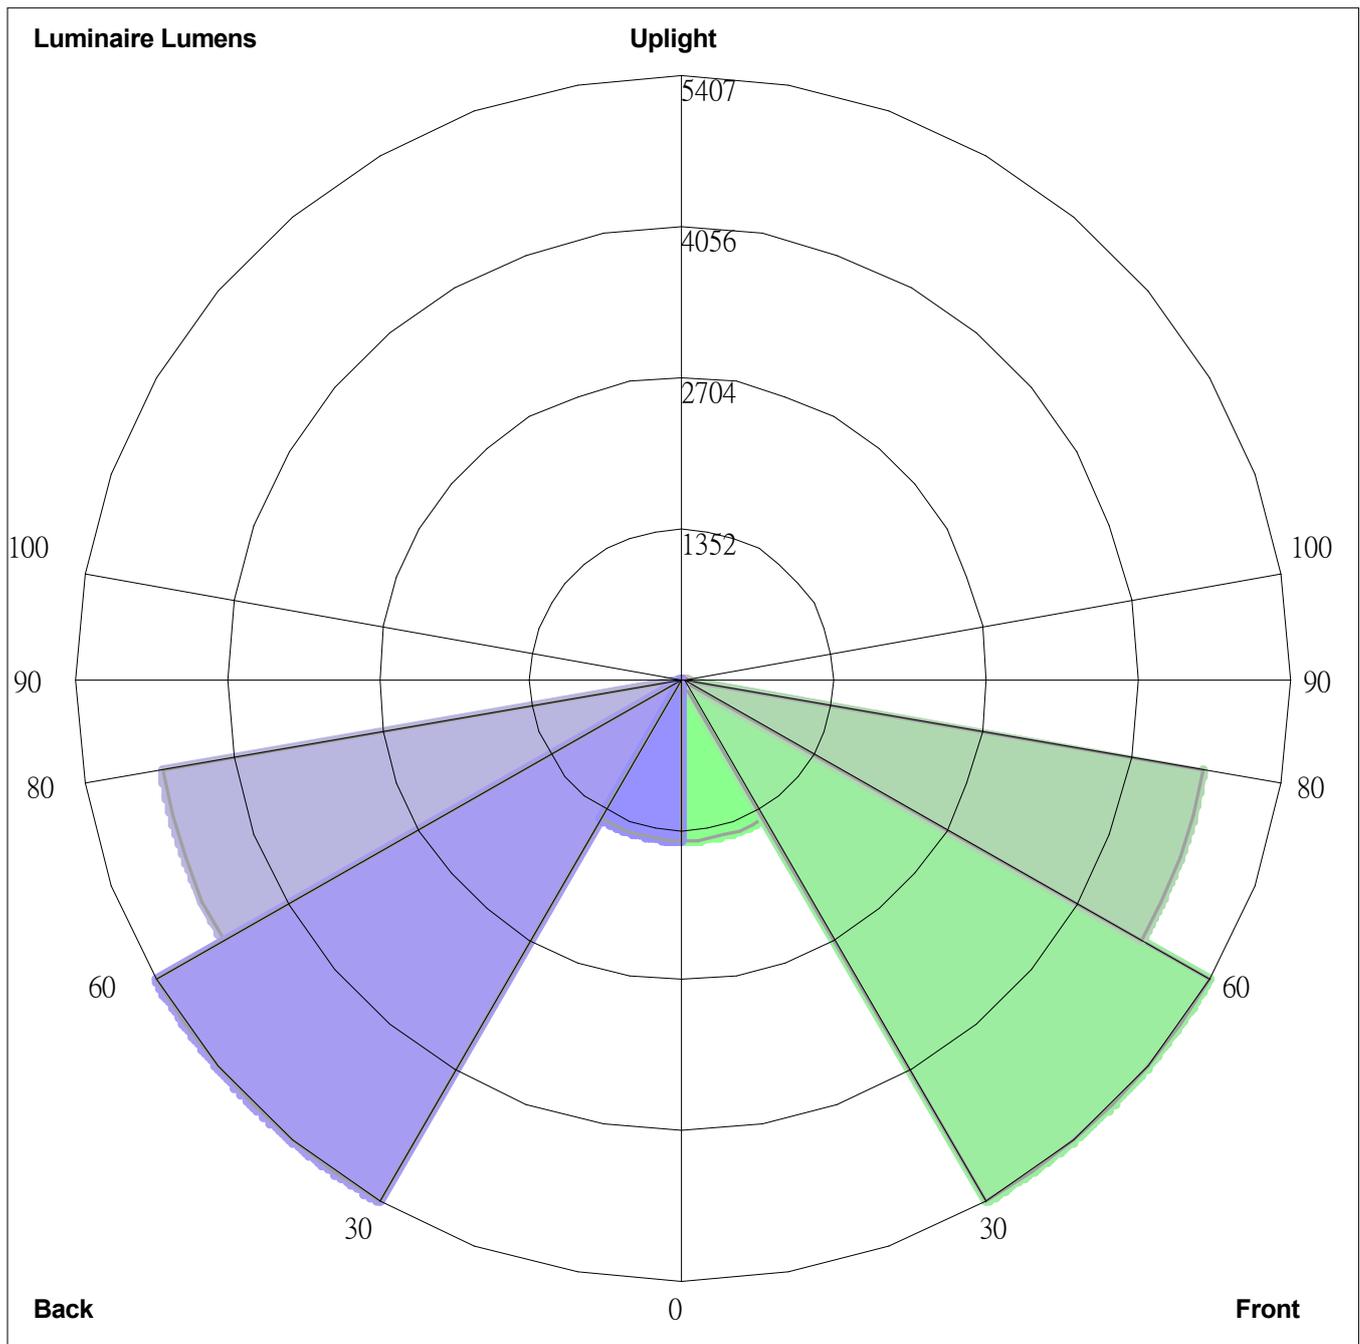

Luminaire Lumens:
 Front: Low=1448.4, Medium=5407.4, High=4707.2, Very High=33.9
 Back: Low=1448.4, Medium=5407.4, High=4707.2, Very High=33.9
 Uplight: Low=0.0, High=0.0

BUG Rating : B4-U0-G2